





Home » Malware » New Android Spyware ActionSpy Revealed via Phishing Attacks from Earth Empusa

# New Android Spyware ActionSpy Revealed via Phishing Attacks from Earth Empusa

Posted on: June 11, 2020 at 5:25 am Posted in: Malware, Mobile Author: Trend Micro









By Ecular Xu and Joseph C. Chen

While tracking Earth Empura, also known as POISON CARP/Evil Eye, we identified an undocumented Android spyware we have named ActionSpy (detected by Trend Micro as AndroidOS ActionSpy.HRX). During the first quarter of 2020, we observed Earth Empusa's activity targeting users in Tibet and Turkey before they extended their scope to include Taiwan. The campaign is reportedly targeting victims related to Uyghurs by compromising their Android and iOS mobile devices. This group is known to use watering hole attacks, but we recently observed them using phishing attacks to deliver their malware.



The malware that infects the mobile devices is found to be associated with a sequence of iOS exploit chain attacks in the wild since 2016. In April 2020, we noticed a phishing page disguised as a download page of an Android video application that is popular in Tibet. The phishing page, which appears to have been copied from a third-party web store, may have been created by Earth Empusa. This is based on the fact that one of the malicious scripts injected on the page was hosted on a domain belonging to the group. Upon checking the Android application downloaded from the page, we found ActionSpy.

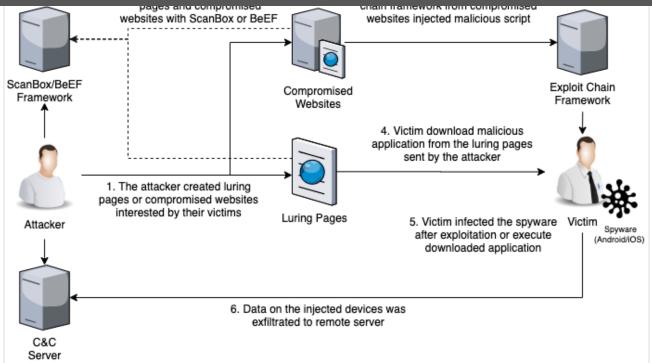


Figure 1. The Earth Empusa attack chain

ActionSpy, which may have been around since 2017, is an Android spyware that allows the attacker to collect information from the compromised devices. It also has a module designed for spying on instant messages by abusing Android Accessibility and collecting chat logs from four different instant messaging applications.

#### Phishing attacks delivering ActionSpy

Earth Empusa's use of phishing pages is similar to our recent report on Operation Poisoned News, which also used web news pages as a lure to exploit mobile devices. Earth Empusa also used social engineering lures to trick its targets into visiting the phishing pages. We found some news web pages, which appear to have been copied from Uyghur-related news sites, hosted on their server in March 2020. All pages were injected with a script to load the cross-site scripting framework BeEF. We suspect the attacker used the framework to deliver their malicious script when they found a targeted victim browsing the said sites. However, our investigation did not yield any script when we attempted to access said phishing pages. How these pages were distributed in the wild is also unclear.


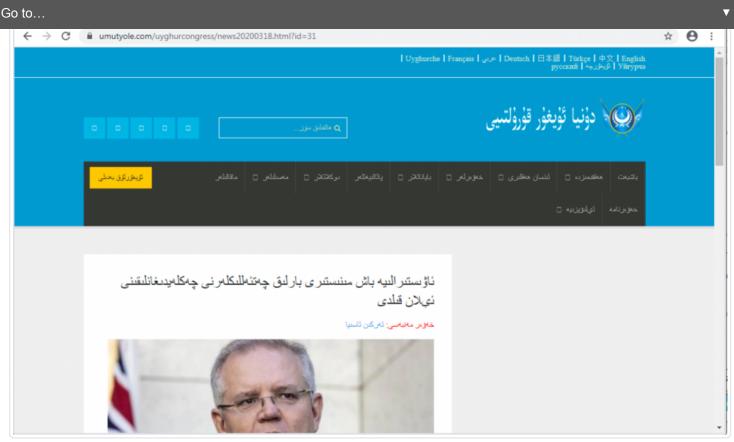


Figure 2. A news page copied from the World Uyghur Congress website used for loading the BeEF framework

Upon continued investigation in late April 2020, we found another phishing page that appears to be copied from a third-party web store and injected with two scripts to load ScanBox and BeEF frameworks. This phishing page invites users to download a video app that is known to Tibetan Android users. We believe the page was created by Earth Empusa because the BeEF framework was running on a domain that reportedly belongs to the group. The download link was modified to an archive file that contains an Android application. Analysis then revealed that the application is an undocumented Android spyware we named ActionSpy.

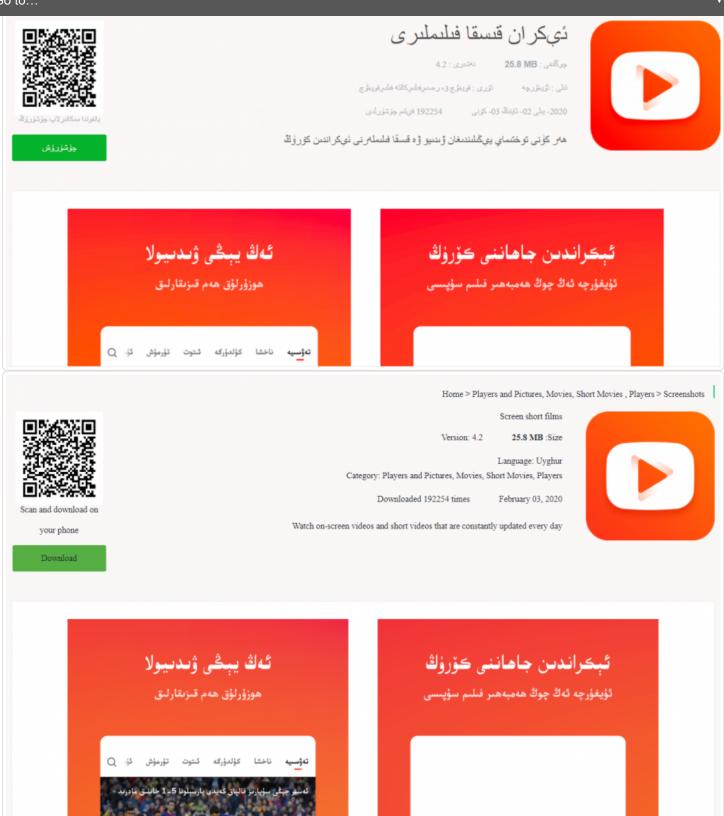

Figures 3 and 4. Fake Android application download page (In original language and translated into English)

Figure 5. The injection of ScanBox (above) and BeEF (below) on the phishing page shows overlap to Earth Empusa's domain

#### **Breaking Down ActionSpy**

This malware impersonates a legitimate Uyghur video app called Ekran. The malicious app has the same appearance and features as the original app. It is able to achieve this with VirtualApp. In addition, it's also protected by Bangcle to evade static analysis and detection.



Figure 6. ActionSpy's icon (left) and appearance (right)



Figure 7. ActionSpy is protected by Bangcle

A legitimate *Ekran* APK file is embedded in the ActionSpy assets directory, and installed in virtual environment after VirtualApp is ready when ActionSpy is launched the first time.

```
public void run() {
    String v0 = "third";
    try {
        FileUtils.copyApkToSDCard(this.val$context, v0, v0);
        VAManager.loadingVA();
        VAManager.install("/sdcard/third/EKRAN.apk");
        FileUtils.deleteDirectory("/sdcard/third");
    }
    catch(Exception v0_1) {
        v0_1.printStackTrace();
    }
}.start();
}
```

```
public static void start(int arg2) {
    VActivityManager.get().startActivity(VirtualCore.get().getLaunchIntent("com.nur.video", arg2), arg2);
}
```

Figure 8 and 9. Install real "Ekran" (above) and launch it (below)

ActionSpy's configuration, including its C&C server address, is encrypted by DES. The decryption key is generated in native code. This makes static analysis difficult for ActionSpy.

Every 30 seconds, ActionSpy will collect basic device information like IMEI, phone number, manufacturer, battery status, etc., which it sends to the C&C server as a heartbeat request. The server may return some commands that will be performed on the compromised device. All the communication traffic between C&C and ActionSpy is encrypted by RSA and transferred via HTTP.

```
v1.dsval Json.put("platform", "android");
v1.dsval_Json.put("userid", AppEnv.getUserId(v1.mContext));
v1.dsval_Json.put("imei", v2.toString());
v1.dsval_Json.put("macaddress", v5_1);
v1.dsval Json.put("phonenum", v6 1);
v1.dsval_Json.put("clientver", v9_1);
v1.dsval_Json.put("identification", v10);
v1.dsval_Json.put("serialno", v11);
v1.dsval_Json.put("imsi", v12.toString());
v1.dsval Json.put("assiststatus", 0);
v1.dsval_Json.put("managestatus", 0);
v1.dsval_Json.put("phonemanufacturer", v7);
v1.dsval Json.put("hardwaremanufacturer", v13 1);
v1.dsval_Json.put("cpuinfo", v14);
v1.dsval Json.put("systemver", v26 1);
v1.dsval Json.put("mainboardinfo", v23);
v1.dsval_Json.put("systemmanufacturer", v24);
v1.dsval Json.put("display", v18);
v1.dsval_Json.put("phonemodel", v19);
v1.dsval Json.put("memory", v20);
v1.dsval Json.put("nettype", v22 1);
v1.dsval_Json.put("netsubtype", v17);
v1.dsval_Json.put("netextrainfo", v25);
v1.dsval_Json.put("battery", v1.mBatteryLevel);
```

Figure 10. Collected device information

Module Name	Description
location	Get device location latitude and longitude
geo	Get geographic area like province, city, district, street address
contacts	Get contacts info
calling	Get call logs
sms	Get SMS messages
nettrace	Get browser bookmarks
software	Get installed APP info
process	Get running processes info
wifi connect	Make device connect to a specific Wi-Fi hotspot
wifi disconnect	Make the device disconnect to Wi-Fi
wifi list	Get all available Wi-Fi hotspots info
dir	Collect specific types of file list on SDCard, like txt, jpg, mp4, doc, xls
file	Upload files from device to C&C server
voice	Record the environment
camera	Take photos with camera
screen	Take screenshot
wechat	Get the structure of WeChat directory
wxfile	Get files that received or sent from WeChat
wxrecord	Get chat logs of WeChat, QQ, WhatsApp, and Viber

### **Abuse of Accessibility**

Normally, a third-party app can't access files belonging to others on Android. This makes it difficult for ActionSpy to steal chat log files from messaging apps like WeChat directly without root permission. ActionSpy, in turn, adopts an indirect approach: it prompts users to turn on its Accessibility service and claims that it is a memory garbage cleaning service.



Figure 11. Prompt to turn on Accessibility

Once the user enables the Accessibility service, ActionSpy will monitor Accessibility events on the device. This is occurs when something "notable" happens in the user interface (such as clicked buttons, entered text, or changed views). When an Accessibility Event is received, ActionSpy checks if the event type is VIEW\_SCROLLED or

WINDOW\_CONTENT\_CHANGED and then check if the events came from targeted apps like WeChat, QQ, WhatsApp, and Viber. If all the above conditions are met, ActionSpy parses the current activity contents and extracts information like nicknames, chat contents, and chat time. All the chat information is formatted and stored into a local SQLite Database. Once a "wxrecord" command is pushed, ActionSpy will gather chat logs in the database and convert them into JSON format before sending it to its C&C server.

```
try {
    if(arg14.get(v8_1).getChildCount() == v3 && (ChatUtils.isRightDateStr(v2_1.substring(v2_1.length() - v12), "H:mm")) && v3 > v10_1) {
        ChatMessage v8_2 = new ChatMessage();
        v8_2.setMessage(v2_1);
        v8_2.setChatTitle(v1);
        v8_2.setPackageName(arg14.get(v0_1).getPackageName());
        this.currentChatMsgs.add(v8_2);
        v8_3 = WxAniDispatcher.Logger;
        v8_3.debug("wx ----> addItem time:" + v2_1);
        goto label_210;
}
```

Figure 12. Code snippet of parsing chat information

We believe ActionSpy has existed for at least three years, based on its certificate sign time (2017-07-10). We also sourced some old ActionSpy versions that were created in 2017.

signer_C	US
signer_O	Android
signer_OU	
signer_L	
owner_O	Android
validDateTo	2047-07-03 02:52:13
owner_L	
validDateFrom	2017-07-10 02:52:13
signer_ST	
owner_CN	Android Debug
owner_OU	
owner_C	US
owner_ST	
serialNumber	7529DC17

Figure 13. Certificate info

META-INF			File folder	
org			File folder	
res			File folder	
AndroidManifest.xml	2.8 KB	1 KB	XML Document	2017-09-18 10:16
classes.dex	370.6 KB	69.1 KB	DEX File	2017-09-18 10:16
resources.arsc	1.1 KB	1.1 KB	ARSC File	2017-09-18 10:16

Figure 14. The earlier version (created in 2017)

#### More on Earth Empusa: Watering hole attacks to compromise iOS systems

Earth Empusa also employs watering hole attacks to compromise iOS devices. The group injected their malicious scripts on websites that their targets could potentially visit and load the injected script from it. We found two kinds of attacks they injected into compromised websites:

- One injection we found is the ScanBox framework. The framework can collect information from a website's visitors by
  using JavaScript to record keypresses and harvest the profiles of the OS, browser, and browser plugins from the client
  environment. The framework is usually used during the reconnaissance stage, allowing them to understand their targets
  and prepare for the next stage of the attack.
- Another injection is their exploit chain framework, which exploits the vulnerabilities on the iOS devices. When a victim
  accesses the framework, it checks the User-Agent header of the HTTP request to determine the iOS version on the
  victim's device and reply with a corresponding exploit code. If the User-Agent doesn't belong to any of the targeted iOS
  versions, the framework will not deliver any additional payload.

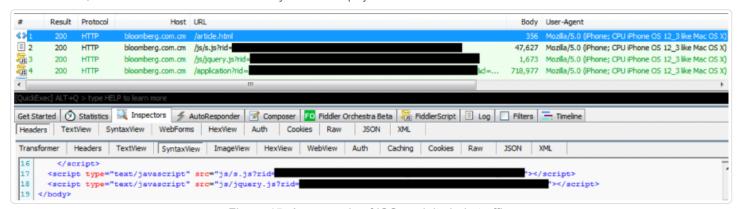


Figure 15. An example of iOS exploit chain traffic

In the first quarter of 2020, the exploit chain framework was upgraded to include a newer iOS exploit that can compromise iOS versions 12.3, 12.3.1, and 12.3.2. Other researchers have also published details of this updated exploit.

Go to... ▼

```
483
              e[Math.random().toString(36).replace(/[^a-z]+/g, "").substr(0, 5)] = 4919, structs.push(e)
484
          1
485
          var r = new Array(32).fill(1.012);
486
          r.rw = 13.37, exp({
487
              dummy: !1,
488
              p: 4660
489
              a: u2d(fake_cell - tag, guess_id),
490
              b: r,
491
              c: !0
492
          1)
493
494
495
     function version is supported() {
496
          var e = window.navigator.userAgent;
497
             (-1 != e.search("Macintosh")) return
          var r = new RegExp("OS ([\\d._]+)", "gi").exec(e)[1];
498
          return "12_3_2" == r || "12_3_1" == r || "12_3" == r
499
500
      version_is_supported() && setTimeout(main, 50);
501
502
      document.removeChild(document.documentElement);
503
```

Figure 16. The script for determining the iOS version and launching the exploit code

We have observed these injections on multiple Uyghur-related sites since the start of 2020. In addition, we have also identified a news website and political party website in Turkey that have been compromised and injected with the same attack. In a more recent development, we found the same injection on a university website as well as a travel agency site based in Taiwan in March 2020. These developments have led as to believe that Earth Empusa is widening the scope of their targets.

#### Best practices and solutions

Earth Empusa is still very active in the wild. We are constantly tracking and monitoring the threat group as it continues to develop new ways to attack its targets.

iOS users are advised to keep their devices updated. Android users, on the other hand, are encouraged to install apps only from trusted places such as Google Play to avoid malicious apps.

Users can also install security solutions, such as the Trend Micro™ Mobile Security for iOS and Trend Micro™ Mobile Security for Android™ (also available on Google Play) solutions, that can block malicious apps. End users can also benefit from their multilayered security capabilities that secure the device owner's data and privacy, and features that protect them from ransomware, fraudulent websites, and identity theft.

For organizations, the Trend Micro<sup>TM</sup> Mobile Security for Enterprise suite provides device, compliance and application management, data protection, and configuration provisioning. The suite also protects devices from attacks that exploit vulnerabilities, prevents unauthorized access to apps and detects and blocks malware and fraudulent websites. Trend Micro's Mobile App Reputation Service (MARS) covers Android and iOS threats using leading sandbox and machine learning technologies to protect users against malware, zero-day and known exploits, privacy leaks, and application vulnerability.

#### **Indicators of C0mpromise**

All of the malicious apps below are detected as AndroidOS\_ActionSpy.HRX.

SHA256	Package Name	Label
56a2562426e504f42ad9aa2bd53445d8e299935c817805b0d9b94315 21769271	com.omn.vvi	Ekran
b6e2fdbf022cd009585f62a3de71464014edd58125eb7bc15c2c670d6d 5d3590	com.isyjv.klxblnwc.r	系统优化

static.apiforssl.com	Domain used by Earth Empusa
cdn.doublesclick.me	Domain used by Earth Empusa
static.doublesclick.info	Domain used by Earth Empusa
status.search-sslkey-flush.com	Domain used by Earth Empusa
http://114.215.41.93/	ActionSpy C&C URL
http://static.doubles.click:8082/	ActionSpy C&C URL

#### MITRE ATT&CK

nitial Access	Persistence	Privilege Escalation	Defense Evasion	Credential Access	Discovery	Lateral Movement	Impact	Collection	Exfiltration	Command And Control	Network Effects	Remote Service Effects																
9 items	6 items	2 items	12 items	11 items	9 items	2 items	9 items	16 items	4 items	7 items	9 items	3 items																
Deliver Malicious App via Authorized App Store	Abuse Device Administrator Access to Prevent	Exploit OS Vulnerability	Application Discovery	Access Notifications	Application Discovery	Attack PC via USB Connection	Clipboard Modification	Access Calendar Entries	Alternate Network Mediums	Alternate Network Mediums	Downgrade to Insecure Protocols	Obtain Device Cloud Backups																
Deliver Malicious	Removal	Exploit TEE Vulnerability	Device Lockout	Access Sensitive Data in Device	Evade Analysis Environment		Data Encrypted for Impact	Access Call Log	Commonly Used List Port  Data Encrypted  Standard  Application Layer	Commonly Used Port	Eavesdrop on Insecure Network	Remotely Track Device Without																
App via Other Means	App Auto-Start at Device Boot	,		Logs	File and Directory		Delete Device Data	Access Contact List		Domain Generation	Communication	Authorization																
Orive-by Compromise	Modify Cached Executable Code		Indicators Access St	Access Stored Application Data	Discovery  Location Tracking		Device Lockout	Access Notifications		Algorithms Standard	Redirect Phone	Remotely Wipe Data Without Authorization																
exploit via Charging	Modify OS Kernel		Code at Runtime	Android Intent Hijacking	Network Service		Generate Fraudulent	Access Sensitive Data in Device		Application Layer Protocol	Exploit SS7 to Track	Patronauton																
Station or PC	or Boot Partition Modify System		Evade Analysis Environment	Capture Clipboard	Scanning		Advertising Revenue	Logs		Standard	Device Location																	
nterfaces	Partition		Input Injection	Capture SMS	Process Discovery System Information		Input Injection	Application Data	apture Audio	Cryptographic Protocol	Jamming or Denial of Service																	
nstall Insecure or Malicious	Modify Trusted Execution		Install Insecure or Mescage Malcicous Configuration Support To Modify OS Kernel or Boot Partition Modify System Input Proportion Partition	Messages	Discovery		Manipulate App Store Rankings or	Capture Audio		Uncommonly Used Port	Manipulate Device Communication																	
Configuration	Environment							Exploit TEE Vulnerability	System Network Configuration		Ratings	Capture Camera		Web Service	Rogue Cellular Base													
ockscreen Bypass																				Input Capture	Discovery		Modify System Partition	Capture Clipboard Data			Station	
Masquerade as egitimate Application								Input Prompt	System Network Connections Discovery		Premium SMS Toll Fraud	Capture SMS Messages			Rogue Wi-Fi Access Points													
Supply Chain Compromise			Modify Trusted Execution Environment	Network Traffic Capture or Redirection				Data from Local System			SIM Card Swap																	
			Obfuscated Files or	URL Scheme Hijacking				Input Capture																				
			Information					Location Tracking																				
			Suppress Application Icon					Network Information Discovery																				
								Network Traffic Capture or Redirection																				









#### **Related Posts:**


- Malicious Optimizer and Utility Android Apps on Google Play Communicate with Trojans that Install Malware, Perform Mobile Ad Fraud
- Dissecting Geost: Exposing the Anatomy of the Android Trojan Targeting Russian Banks
- Operation Poisoned News: Hong Kong Users Targeted With Mobile Malware via Local News Links
- Barcode Reader Apps on Google Play Found Using New Ad Fraud Technique




# Say NO to ransomware.

Trend Micro has blocked over 100 million threats and counting

Learn how to protect Enterprises, Small Businesses, and Home Users from ransomware:

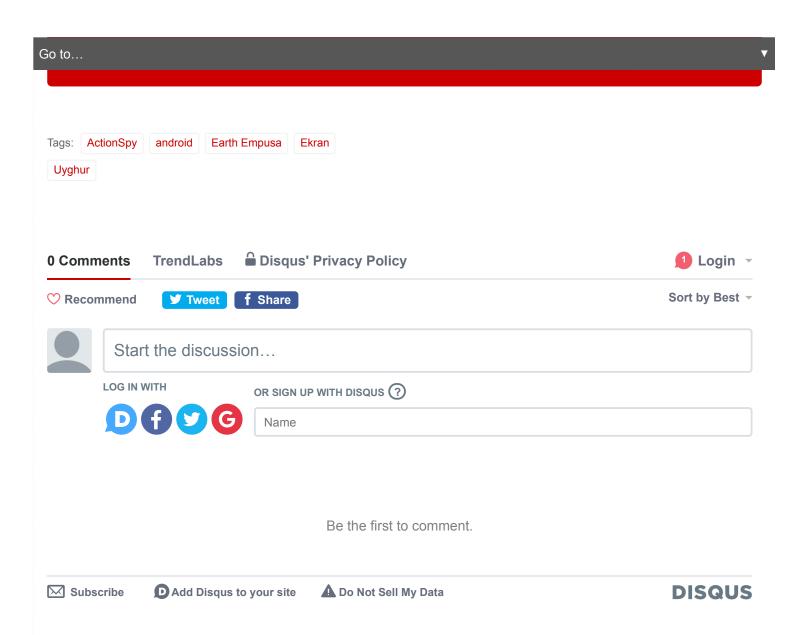

# Security Predictions for 2020



Cybersecurity in 2020 will be viewed through many lenses — from differing attacker motivations and cybercriminal arsenal to technological developments and global threat intelligence — only so defenders can keep up with the broad range of threats.

Read our security predictions for 2020.

# **Business Process Compromise**



more, read our Security 101: Business Process Compromise.

#### Recent Posts

New Android Spyware ActionSpy Revealed via Phishing Attacks from Earth Empusa

Patch Tuesday: Fixes for LNK, SMB, and SharePoint Bugs

New Tekya Ad Fraud Found on Google Play

Barcode Reader Apps on Google Play Found Using New Ad Fraud Technique

Backdoor, Devil Shadow Botnet Hidden in Fake Zoom Installers

# Popular Posts

Barcode Reader Apps on Google Play Found Using New Ad Fraud Technique

QAKBOT Resurges: Despite Takedowns, Online Banking Threats Persist

Exposed Redis Instances Abused for Remote Code Execution, Cryptocurrency Mining

Third-Generation QAKBOT: Repackaged with Improved Propagation

TA505 At It Again: Variety is the Spice of ServHelper and FlawedAmmyy

# Stay Updated



**Email Subscription** 

Your email here

Subscribe

HOME AND HOME OFFICE FOR BUSINESS SECURITY INTELLIGENCE ABOUT TREND MICRO

Asia Pacific Region (APAC): Australia / New Zealand, 中国, 日本, 대한민국, 台灣 Latin America Region (LAR): Brasil, México

North America Region

(NABU): United States, Canada

Europe, Middle East, & Africa Region (EMEA): France, Deutschland / Österreich / Schweiz, Italia, Россия, España, United Kingdom / Ireland

Privacy Statement

Legal Policies

Copyright © 2020 Trend Micro Incorporated. All rights reserved.